


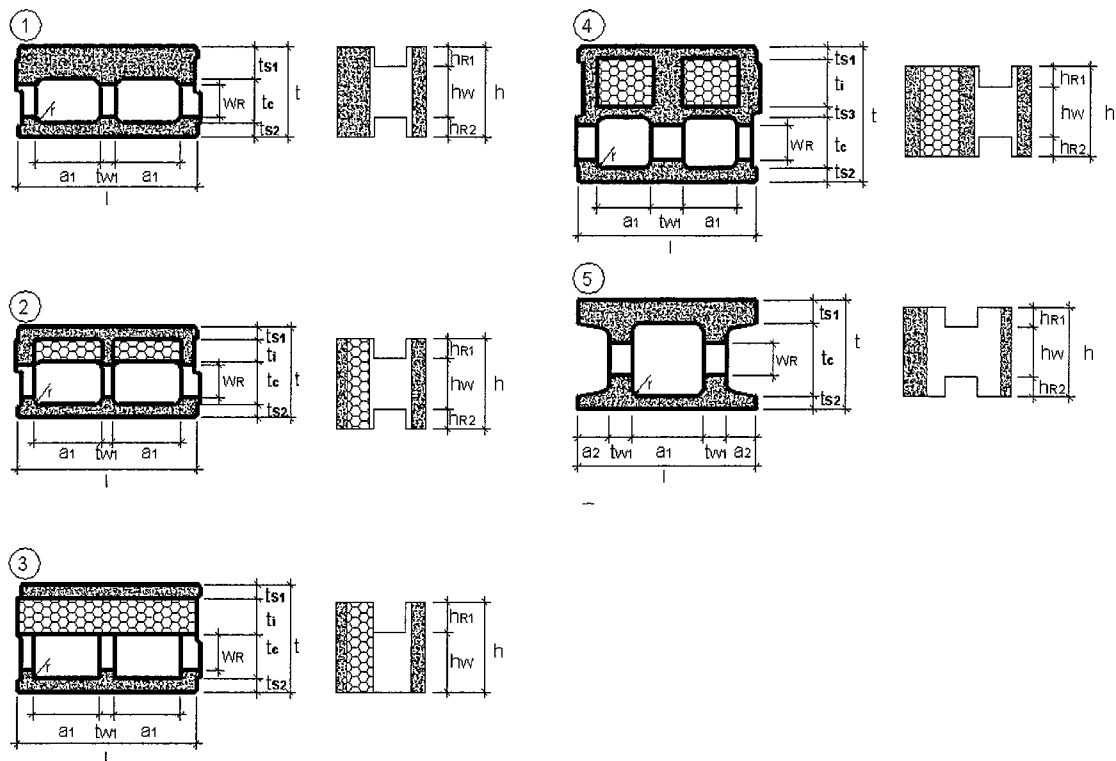

Typ	Abb.	t	l	t _c	t _{s1}	t _{s2}	t _{s3}	t _i	t _w	r	a ₁	a ₂	w _R	h _{R1}	h _{R2}	h _w	AR
		mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	cm ²
DM 15/9 *	1	150	498	90	30	30	-	-	30	15	194	-	80	50	50	150	80
DMi 17/12 *	1	170	498	120	25	25	-	-	40	12,5	184	-	100	30	30	190	60
DMi 20/13Lap *	5	200	498	130	35	35	-	-	55	15	218	85	100	50	50	150	100
DMi 25/18Lap *	5	250	498	180	35	35	-	-	54	20	196	97	100	50	50	150	100
DSi 30/20Lap *	5	300	498	200	65	35	-	-	64	20	200	85	100	50	50	150	100
DM 22/15 *	1	220	498	150	35	35	-	-	30	25	190	-	100	50	50	150	100
DM 25/16 *	1	250	498	160	45	45	-	-	30	25	192	-	100	50	50	150	100
DM 30/22 *	1	300	498	220	40	40	-	-	40	5	185	-	100	50	50	150	100
DS 25/12 *	1	250	498	120	90	40	-	-	40	25	180	-	100	50	50	150	100
DS 30/15 *	1	300	498	150	105	45	-	-	90	20	150	-	100	50	50	150	100
DSs 30/14neu	4	300	498	140	30	30	30	70	90	20	150	-	100	50	50	150	100
DSs 30/15n	2	300	498	150	35	40	-	75	40	30	185	-	100	50	50	150	100
DSs 37,5/12n	2	375	498	120	40	40	-	175	53	25	171	-	100	50	50	150	100
DSs 37,5/14n	2	375	498	140	40	40	-	155	53	25	171	-	100	50	50	150	100
DSs 25/12	2	250	498	120	35	35	-	60	30	20	190	-	100	50	50	150	100
DSs 30/12	2	300	498	120	40	40	-	100	40	5	185	-	100	50	50	150	100
DSs 30/12n	2	300	498	120	35	40	-	105	40	5	185	-	100	50	50	150	100
DSs 30/13	2	300	498	130	40	40	-	90	40	5	185	-	100	50	50	150	100
DSs 30/14	2	300	498	140	40	40	-	80	40	5	185	-	100	50	50	150	100
DSs 30K14	3	300	498	140	40	40	-	80	40	5	185	-	90	80	0	170	72
DSs 36,5/12	2	365	498	120	40	40	-	165	50	15	174	-	100	50	50	150	100
DSs 36,5/14	2	365	498	140	40	40	-	145	50	15	174	-	100	50	50	150	100

* siehe 2.2.3.1

DurisolDurisol Schalungssystem
Standardelemente**Anhang D1**der europäischen
technischen Zulassung
ETA-05/0261