



Anchor rod without perforated sleeve – installation in solid masonry

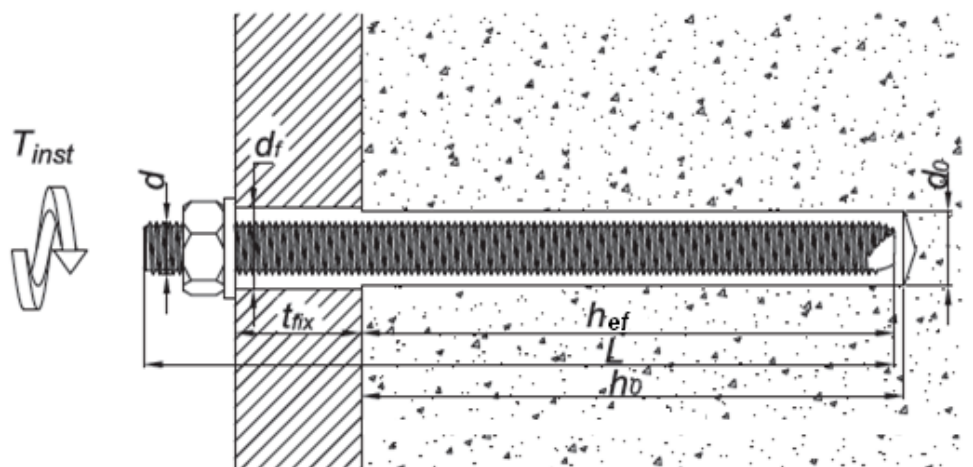

Anchor rod with perforated sleeve – installation in perforated masonry

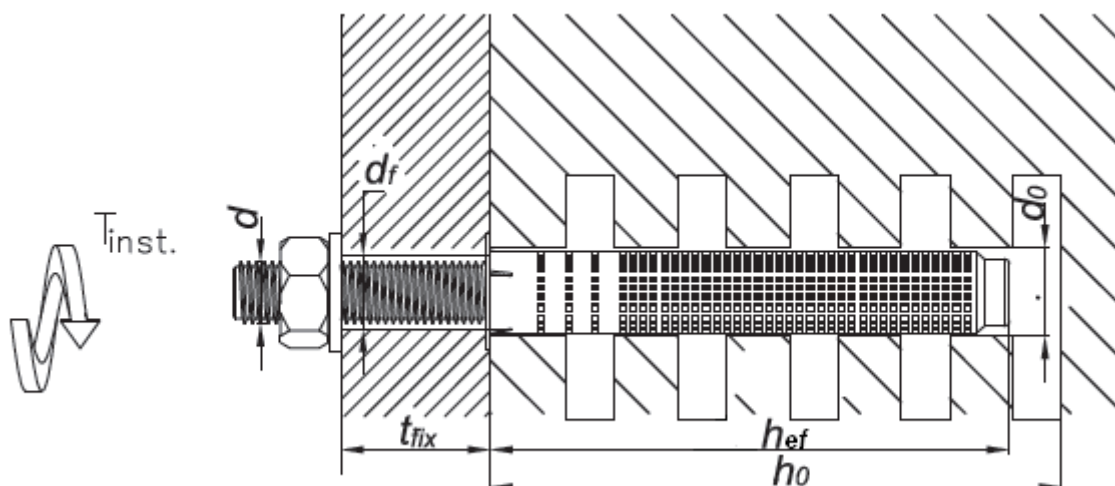

Base material	use categories b, c and d (solid, hollow or perforated masonry, AAC)
Installation and use	category w/w (installation and use in dry and wet structures)
Service temperature range	-40°C to +40°C (max. short term temperature +40°C and max. long term temperature +24°C) -40°C to +80°C (max. short term temperature +80°C and max. long term temperature +50°C)

Indi-Fix Résine Polyester Polyvalente
Indi-Fix Résine Polyester Polyvalente-S
Indi-Fix Résine Polyester Polyvalente-W

Intended use and use categories

Annex 1
of European
Technical Approval
ETA-13/0938