




Intended use in hollow brick

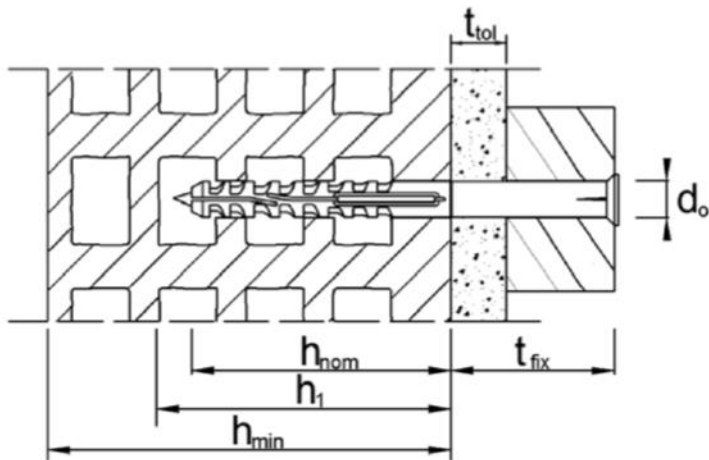

Intended use in concrete or solid base material

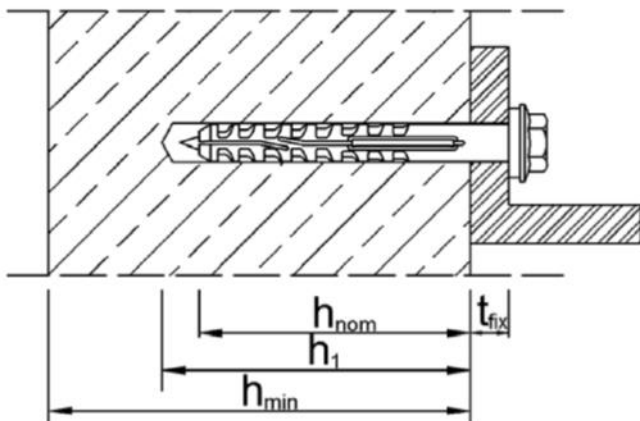

Intended use in precast prestressed hollow core slabs

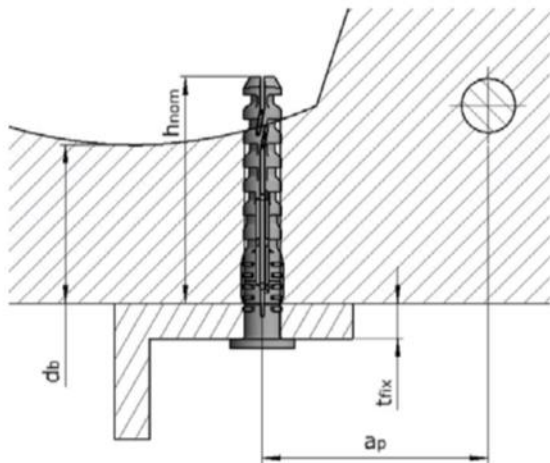

- h_{nom} = overall plastic anchor embedment depth in the base material
- h_1 = depth of drilled hole to deepest point
- h_{min} = Minimum thickness of member
- t_{fix} = thickness of fixture
- t_{tol} = thickness of layer or non-load bearing coating
- d_b = mirror thickness
- a_p = distance between plug and reinforcement

Apolo MEA multifunction frame plug

Product description
Installed condition

Annex A1