



Installation threaded rod M8 to M30


Pre-setting installation or through-setting installation (annular gap filled with mortar)

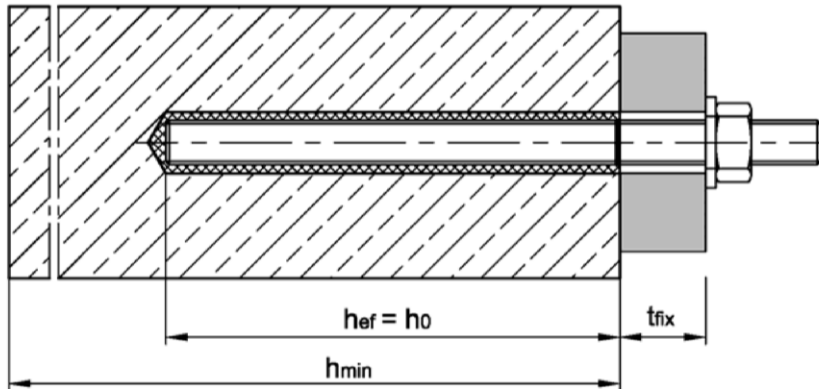

Installation internally threaded anchor rod VMU-IG M6 to VMU-IG M20

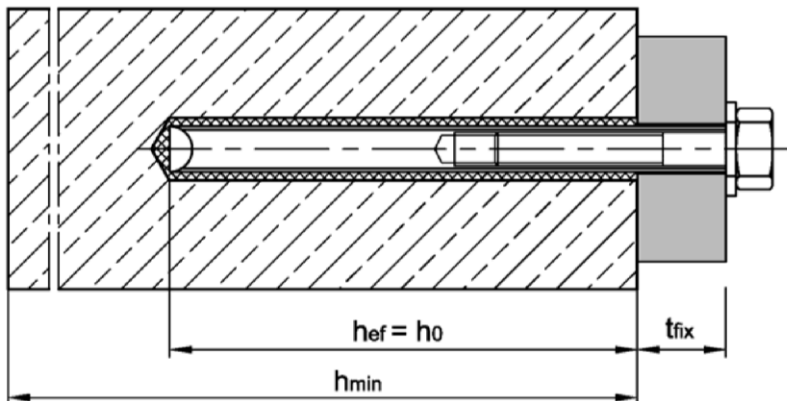

Installation reinforcing bar Ø8 to Ø32

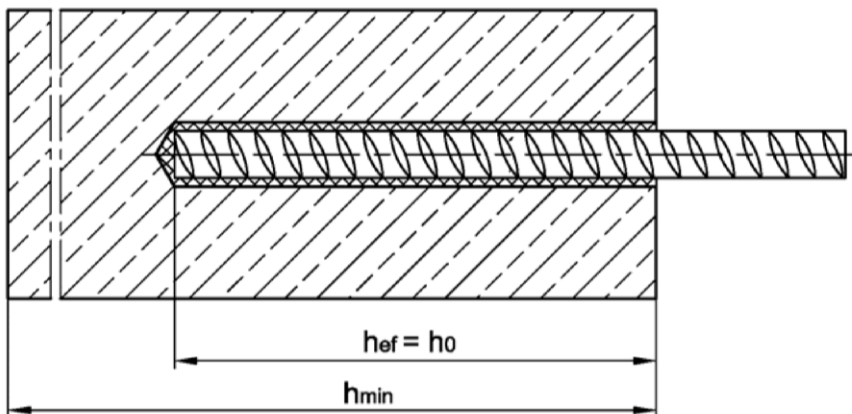

- t_{fix} = thickness of fixture
- h_{ef} = effective anchorage depth
- h_0 = depth of drill hole
- h_{min} = minimum thickness of member

Injection System VMH for concrete

Product description
Installation situation

Annex A1