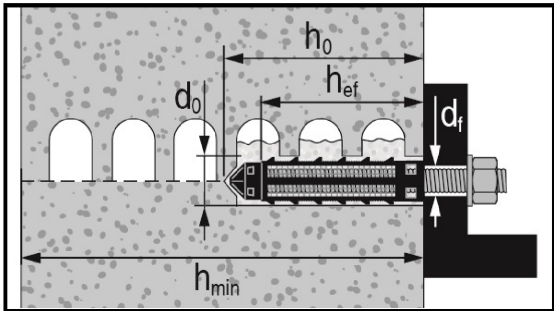
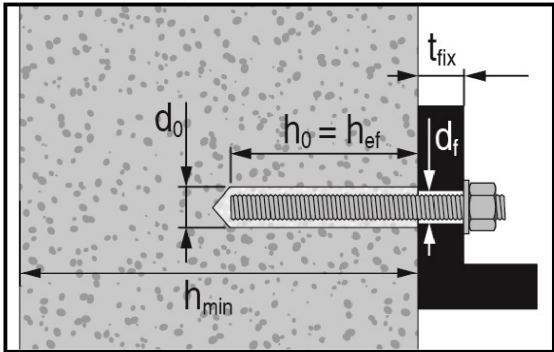


Installed condition


**Figure A1:** Hollow brick with threaded rod, HAS-U-..., HIT-V-... and sieve sleeve HIT-SC (see Table B5) or with internally threaded sleeve HIT-IC and sieve sleeve HIT-SC (see Table B6)



**Figure A2:** Solid brick with threaded rod, HAS-U-..., HIT-V-... (see Table B7)



**Figure A3:** Solid brick with internally threaded sleeve HIT-IC (see Table B8)

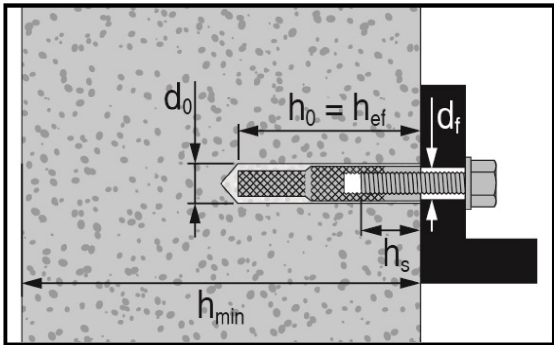

Hilti HIT-MM Plus

Product description  
Installed condition.

Annex A1