


**Rods with internally threaded socket: M6/10/75, M8/12/75, M8/12/90, M10/16/75, M10/16/100, M12/16/100, M16/24/125**



Marking: R - Identifying mark  
 ITS - product index  
 Z - carbon steel or A4 - stainless steel  
 XX - thread size  
 YYY - length of sleeve

**Reinforcing bars (rebars): Ø8 to Ø32**

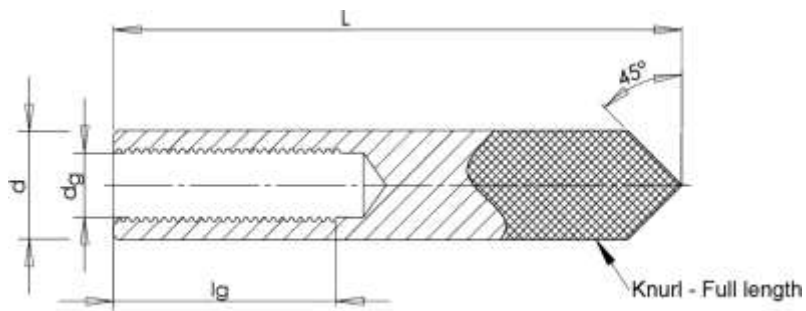

embedment depth marking  $h_{ef}$

**R-KER / RV200, R-KER-W / RV200-W  
 and R-KER-S / RV200-S**

**Product description**  
 Anchor rods – rod with internally threaded socket and rebar

**Annex A1**  
 of European  
 Technical Assessment  
 ETA-13/0805