

Brillux WDV-System EPS ZF


Annex 3

Profiles

Polyvinyl chloride (PVC) profiles, PVC-U, EGL, 082-05-T33 to EN ISO 1163-1:1999 are to be used in the mechanically fixed ETICS with profiles.

The Pull-through resistance of fixings from profiles is ≥ 500 N.

Horizontal profile – "Brillux WDVS Halteleiste 3543" (dimensions in millimetres)

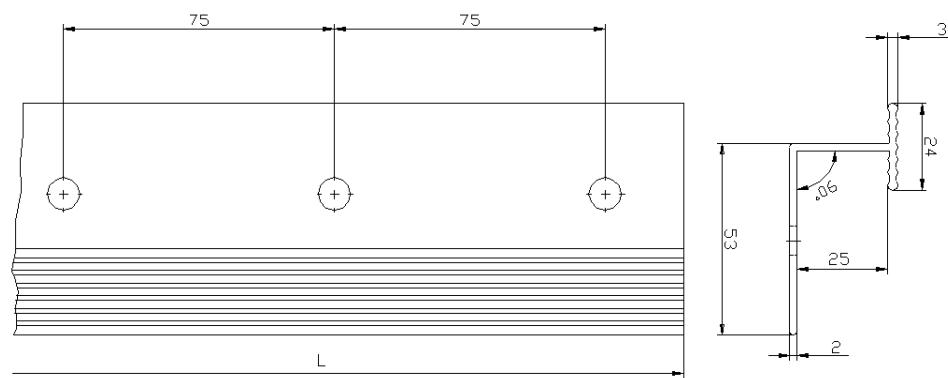

Vertical connection profile "Brillux WDVS Verbindungsleiste 3544" (dimensions in millimetres)

